


Reduce crown using drop crotch pruning technique.

Prune no more than necessary to secure tree on transport vehicle.

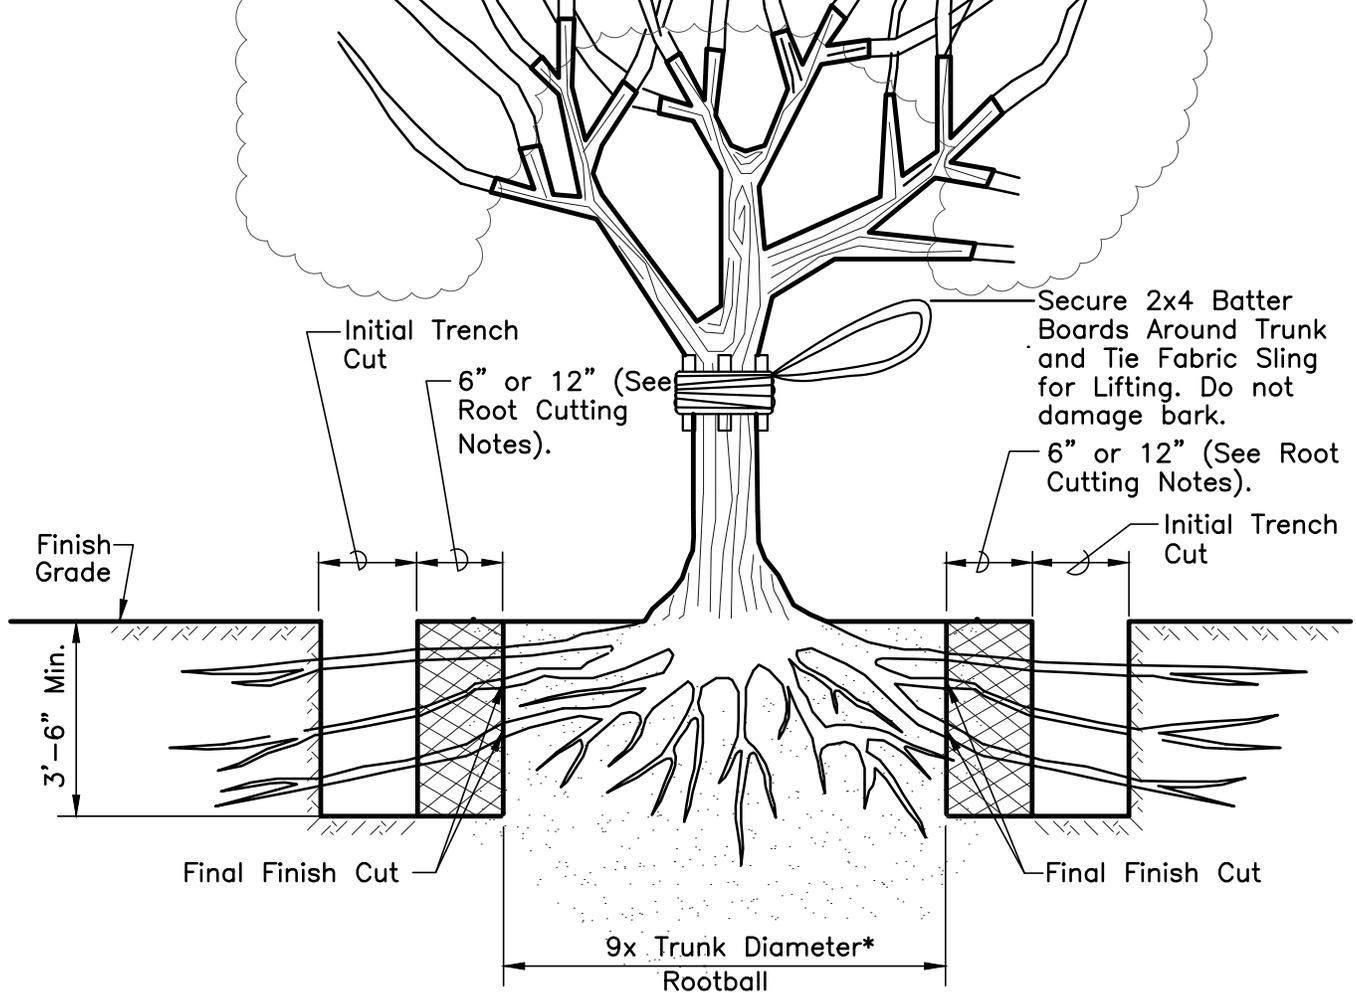

Secure 2x4 Batten Boards Around Trunk and Tie Fabric Sling for Lifting. Do not damage bark.

6" or 12" (See Root Cutting Notes).

Initial Trench Cut

Finish Grade

3'-6" Min.

Final Finish Cut

Final Finish Cut

9x Trunk Diameter*
Rootball

Note:

1. All relocation shall be done under the supervision of a certified arborist per specifications.
2. Trunk diameter measured @ breast height or 4'-6".

Root Cutting Notes:

1. Make initial trench cuts 6" beyond the final finish cut when using a trencher.
2. Make initial trench cuts 12" beyond the final finish cuts when using a backhoe.
3. Hand excavate around roots to the size of desired rootball and then trim off protruding roots by handsaw or chainsaw.

L-6(F)

<p>L-6</p>	<p>STANDARD DETAILS</p>	<p>LARGE TREE RELOCATION DETAIL</p> <p>SCALE: NOT TO SCALE</p> <p>REVISED: APRIL 2003</p>	<p>CITY COUNTY OF HONOLULU</p>
-------------------	-----------------------------	--	--------------------------------