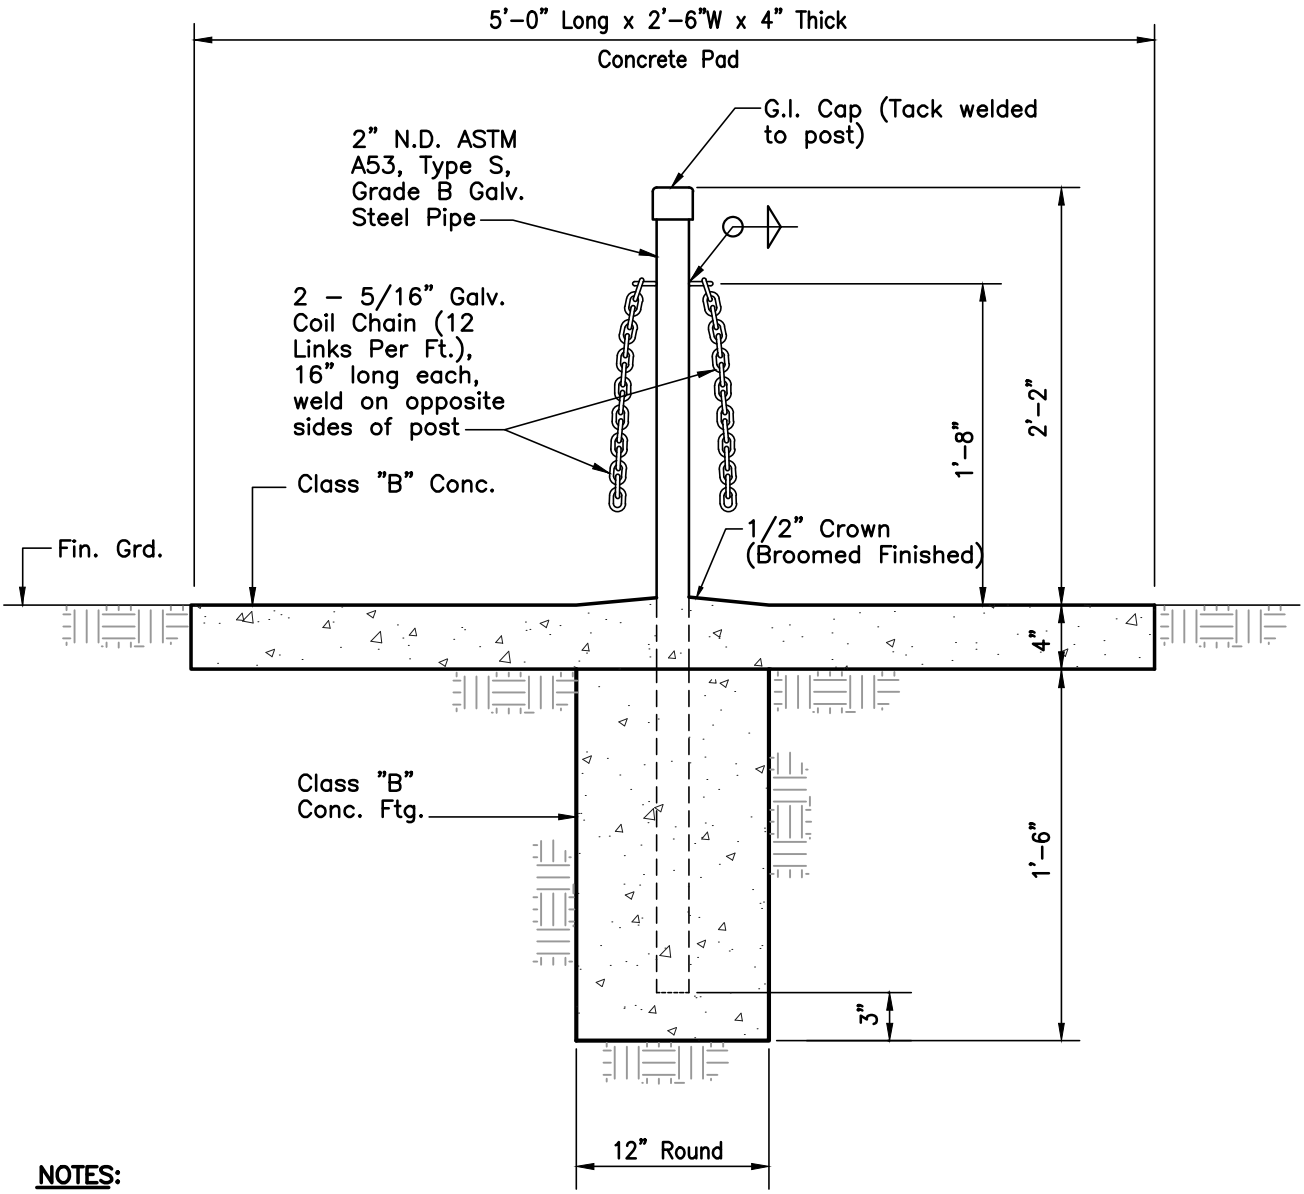

NOTES:

1. All welded connections shall be painted with two coats of ZRC Cold Galvanizing Compound.
2. Contractor shall furnish and install trash can posts at locations determined by the Officer in Charged.
3. Trash Can post shall be centered on the concrete pad.
3. Concrete Pad Shall be Broom Finished.

M-23(FF)

CITY COUNTY OF HONOLULU	TRASH CAN POST W/CONCRETE PAD SCALE: NOT TO SCALE REVISED: FEBRUARY 2007	STANDARD DETAILS	M-23