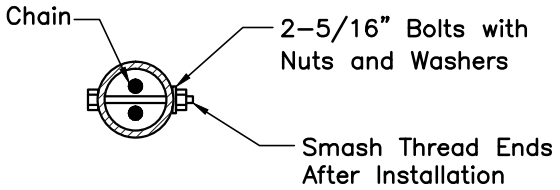


REFLECTOR DETAIL

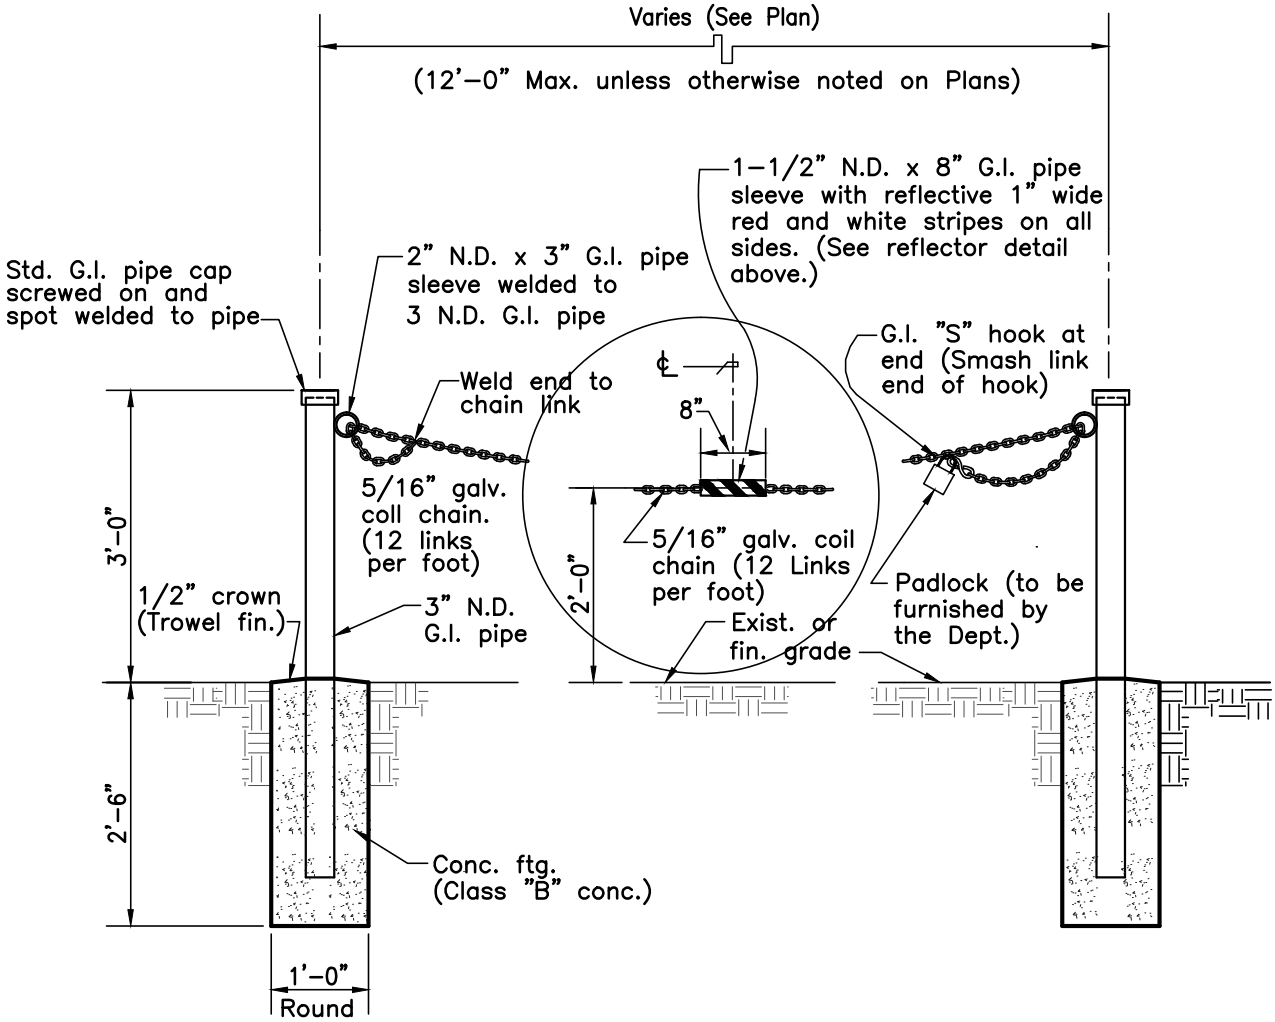


NOTES:

1. All welded connections shall be painted with two coats of Z.R.C. cold galvanizing compound.
2. "S" hooks shall be 5/16"ø with tip tapered to 3/16".
3. No splicing shall be allowed on G.I. pipe posts.
4. All pipe sizes are nominal diameter (N.D.).

M–4(F)

| | | | |
|---|---|---|---|
| M–4 | STANDARD DETAILS | ACCESS CHAIN BARRIER DETAIL<br>SCALE: NOT TO SCALE REVISED: APRIL 2003 | CITY COUNTY OF HONOLULU |